





Series 194
XWL

N

1450rpm

ø 24mm

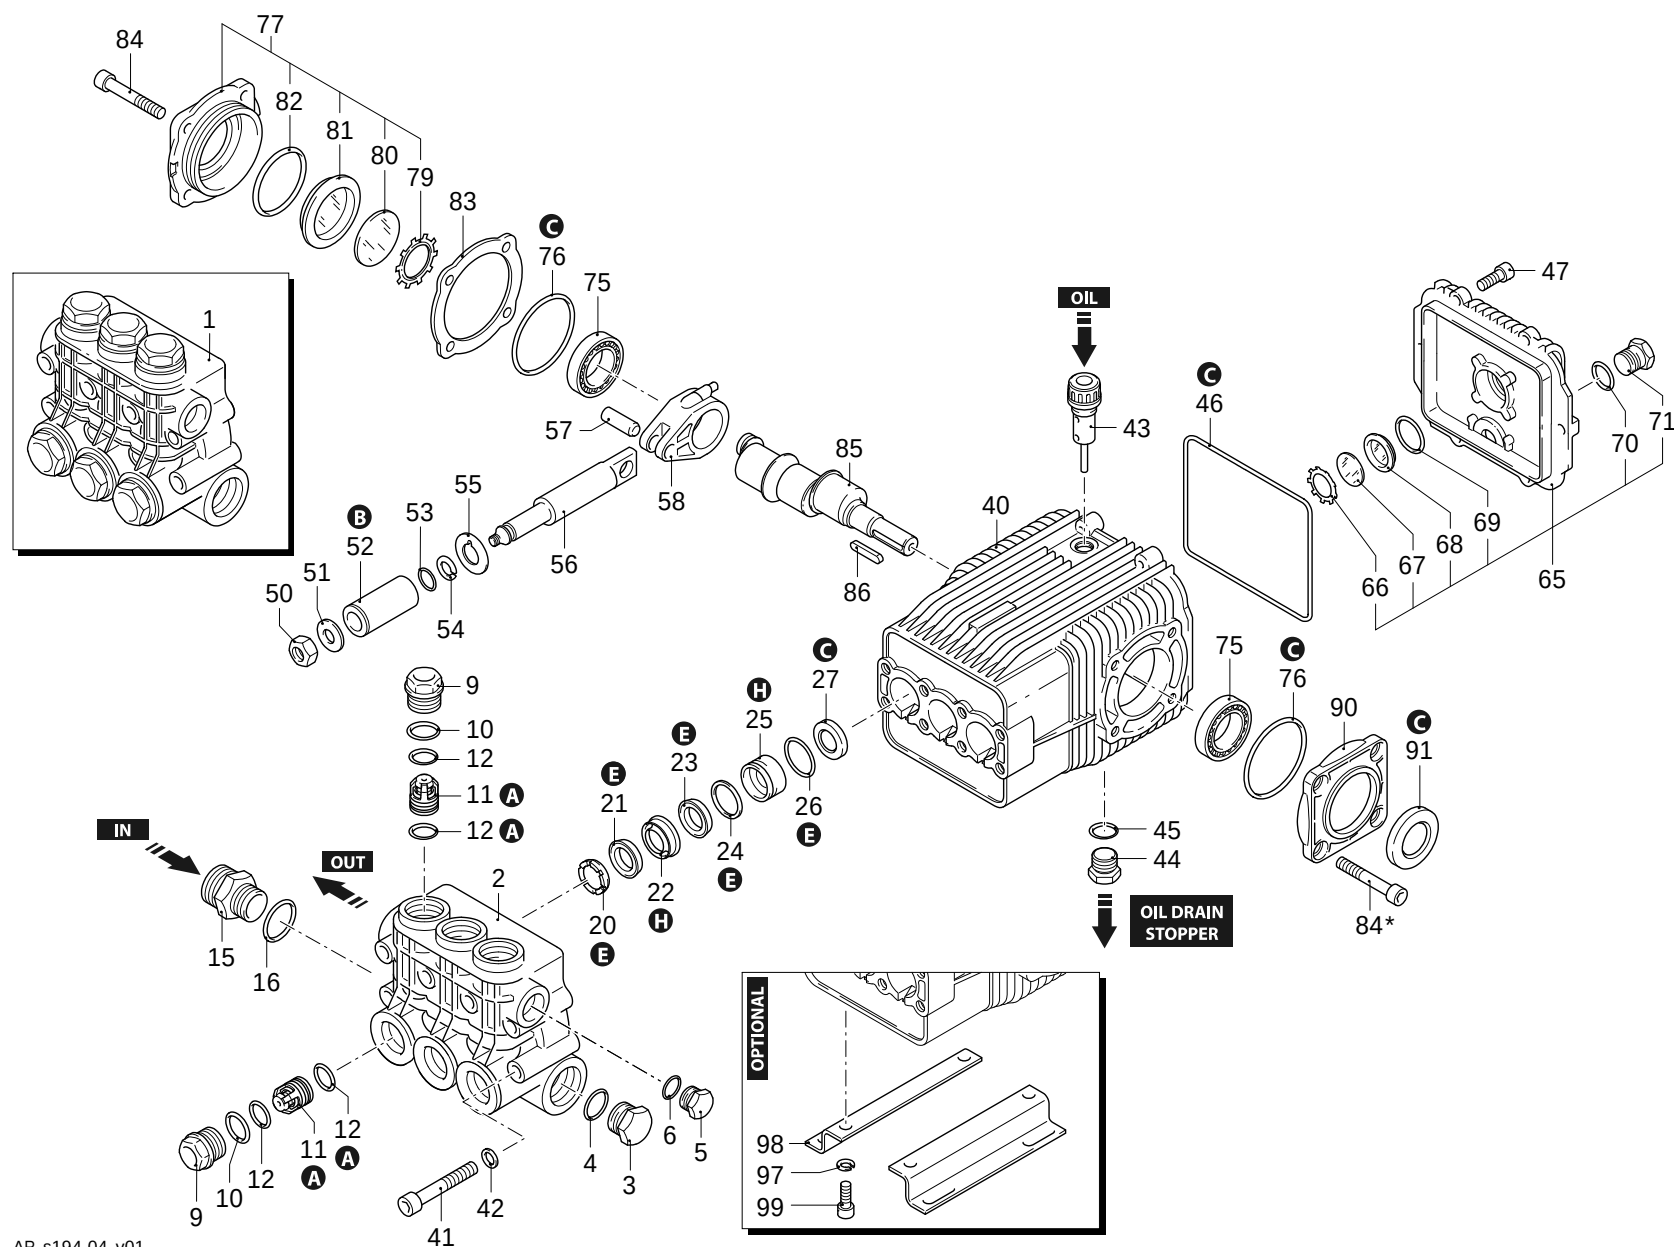

AR_s194-04_v01

13/05/2023



Series 194
XWL

N

1450rpm

ø 24mm

P	Code	Description	Q	Note	Validity	P	Code	Description	Q	Note	Validity
1	1949210	Head assembly	Ø 28 nickel plated	1		66	1260430	Ring	1		
2	1941860	Head	nickel plated	1		67	1780690	Plate	1		
3	1140480	Plug	3/4" G nickel	1	C=35Nm	68	1260250	Level gauge	1		
4	550350	O-ring	Ø 23,81x2,62	1		69	1140450	O-ring	Ø 20,24x2,62	1	Lubricate with grease Molykote PG54
5	1981180	Plug	3/8" G nickel	1	Screw with Loxeal 55-14 / C=20Nm	70	740290	O-ring	Ø 14x1,78	1	Lubricate with grease Molykote PG54
6	740290	O-ring	Ø 14x1,78	1	Lubricate with grease Molykote PG54	71	1980740	Plug	3/8" G brass	1	C=20Nm
9	1941790	Plug	nickel	6		75	1140410	Bearing		2	
10	1940150	Ring	anti-extrusion	6		76	1941380	O-ring	Ø 66,34x2,62	2	
11	1949050	Complete valve		6		77	1949011	Cover		1	
12	1140450	O-ring	Ø 20,24x2,62	12	Lubricate with grease Molykote PG54	79	1941290	Ring		1	
15	1943270	Fitting	1" G - 3/4" G (M-M)	1		80	1941260	Plate		1	
16	550350	O-ring	Ø 23,81x2,62	1		81	1941270	Level gauge		1	
20	1941570	Ring	support Ø 28	3		82	100410	O-ring	Ø 34,6x2,62	1	
21	820630	Water seal	Ø 28 brown	3	Lubricate with grease Molykote PG54	83	1941390	Shim 0.05mm		1	
22	1140280	Piston guide	front Ø 28	3		83	1941400	Shim 0.10mm		1	
23	2520360	Gasket	Ø 28	3	Lubricate with grease Molykote PG54	83	1941410	Shim 0.19mm		1	
24	2520230	Ring	anti-extrusion	3		83	1941420	Shim 0.25mm		1	
25	1942260	Piston guide	rear Ø 28	3		84	850370	Screw	TCEI M8x16	4	C=24,5Nm
26	1140490	O-ring	Ø 37,82x1,78	3		84*	850370	Screw	TCEI M8x16	4	C=24,5Nm
27	1940560	Ring	seal	3		85	1943280	Shaft	10 marked	1	
40	1941330	Pump body		1		86	650250	Key		1	
41	1940260	Screw	TCEI M10x80	8	C=50Nm	90	1941240	Support		1	
42	650530	Washer		8		91	820681	Ring	seal	1	Screw with Loxeal 55-14 / C=10Nm
43	1140370	Plug		1		97	200231	Washer		4	
44	1980740	Plug	3/8" G brass	1	C=20Nm	98	1940370	Foot		2	
45	740290	O-ring	Ø 14x1,78	1	Lubricate with grease Molykote PG54	99	1940380	Screw	TCEI 10x18	4	C=50Nm
46	1940410	O-ring	Ø 132x3	1		A	2780	Valve kit		1	
47	1200430	Screw	TCEI M6x16	6	Screw with Loxeal 55-14 / C=10Nm	B	1849	Piston kit	Ø 28	1	
50	1940570	Nut		3	Screw with Loxeal 55-14 / C=20Nm	C	2873	Oil seal kit		1	
51	1940580	Washer		3		E	42708	Water seal kit	Ø 28	1	
52	1140190	Piston	Ø 28	3		H	42707	Piston guide kit	Ø 28	1	
53	880840	O-ring	Ø 9,25x1,78	3	Lubricate with grease Molykote G807						
54	1940120	Ring	anti-extrusion	3							
55	1140160	Plate		3							
56	1940070	Piston	guide	3							
57	1940060	Pin		3							
58	1940051	Connecting-rod	aluminium	3	Lubricate with grease Molykote BR2 PLUS / C=20Nm						
65	1949010	Cover	complete	1							

Revision: 1

Oil type: SAE 15W40

Attachment:

Date: 13/05/2023

Oil quantity: 0,870 Kg

C=Tightening torque (Tolerance +0 ÷ -10%)

* = Not present for electric pump